


SANTA ROSA LEAD PRODUCTS

33 SOUTH UNIVERSITY STREET HEALDSBURG, CA 95448

P: 707-431-7757 / F: 707-431-1749

"SC" SERIES LEAD FLASHINGS

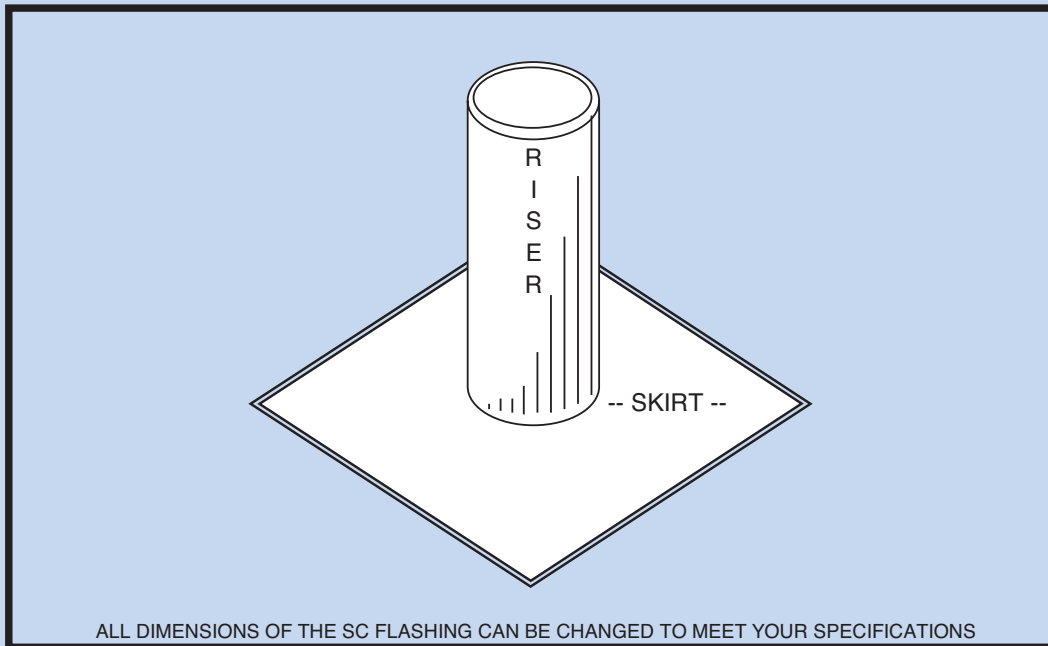

CONSTRUCTION CHARACTERISTICS OF THE "SC" SERIES LEAD FLASHING

SANTA ROSA LEAD PRODUCTS (SRLP) MANUFACTURES AN ALL-LEAD FLASHING FABRICATED FROM PURE LEAD THAT MEETS **ASTM B749 COPPER BEARING** AND FEDERAL SPECIFICATION **QQ-L-201f**. THE STANDARD FLASHING CONSISTS OF A **CYLINDRICAL, SEAMLESS RISER** WHERE A STEEL-REINFORCED BOOT IS NOT REQUIRED.

STANDARD FLASHINGS ARE AVAILABLE IN **4# LEAD** WITH A **6" SKIRT** AND A SEAMLESS **12" RISER**. **2-1/2#** AND **6#** FLASHINGS ARE READILY AVAILABLE IN THE "SC" STYLE. OTHER SKIRT SIZES AND RISER HEIGHTS CAN EASILY BE ACCOMMODATED AS WELL. "SC" STYLE FLASHINGS ARE ALSO AVAILABLE IN A "**SPLIT STYLE**" WHERE ACCESS IS A PROBLEM. FLASHINGS CAN ALSO BE CUT TO ANY PITCH TO MEET YOUR REQUIREMENTS.

THE "SC" SERIES OF FLASHINGS IS ALSO AVAILABLE IN **LEAD-BURNED / "WELDED"** ("SC-LB" SERIES) FLASHINGS, WHERE PURE LEAD WIRE INSTEAD OF A LEAD-TIN SOLDER ALLOY IS USED TO JOIN THE BASE TO THE RISER.

THE FLASHING CAN BE TOPPED OFF WITH A **SEAMLESS LEAD** OR **CAST-IRON COUNTER-FLASHING**. BOTH STYLES OF COUNTER-FLASHINGS ALLOW FOR THE EXPANSION AND CONTRACTION OF THE ROOF (WITH HOT AND COLD) WITHOUT DISTURBING THE FLASHING.

WHEN PROPERLY INSTALLED, THE "SC" SERIES LEAD FLASHING WILL LAST THE LIFE OF ANY ROOFING SYSTEM!